


BAFFLE




ABOUT

Acoustics play an integral role in any space. A poor acoustic environment will often increase stress and decrease concentration. This application is suspended from the ceiling and can be installed in a multitude of patterns. Panel-Tex Baffles provide a 1.0 Noise Reduction Coefficient (NRC) rating wrapped in fabric. DFB recommends Carnegie Xorel or Camira Blazer felt for this application.

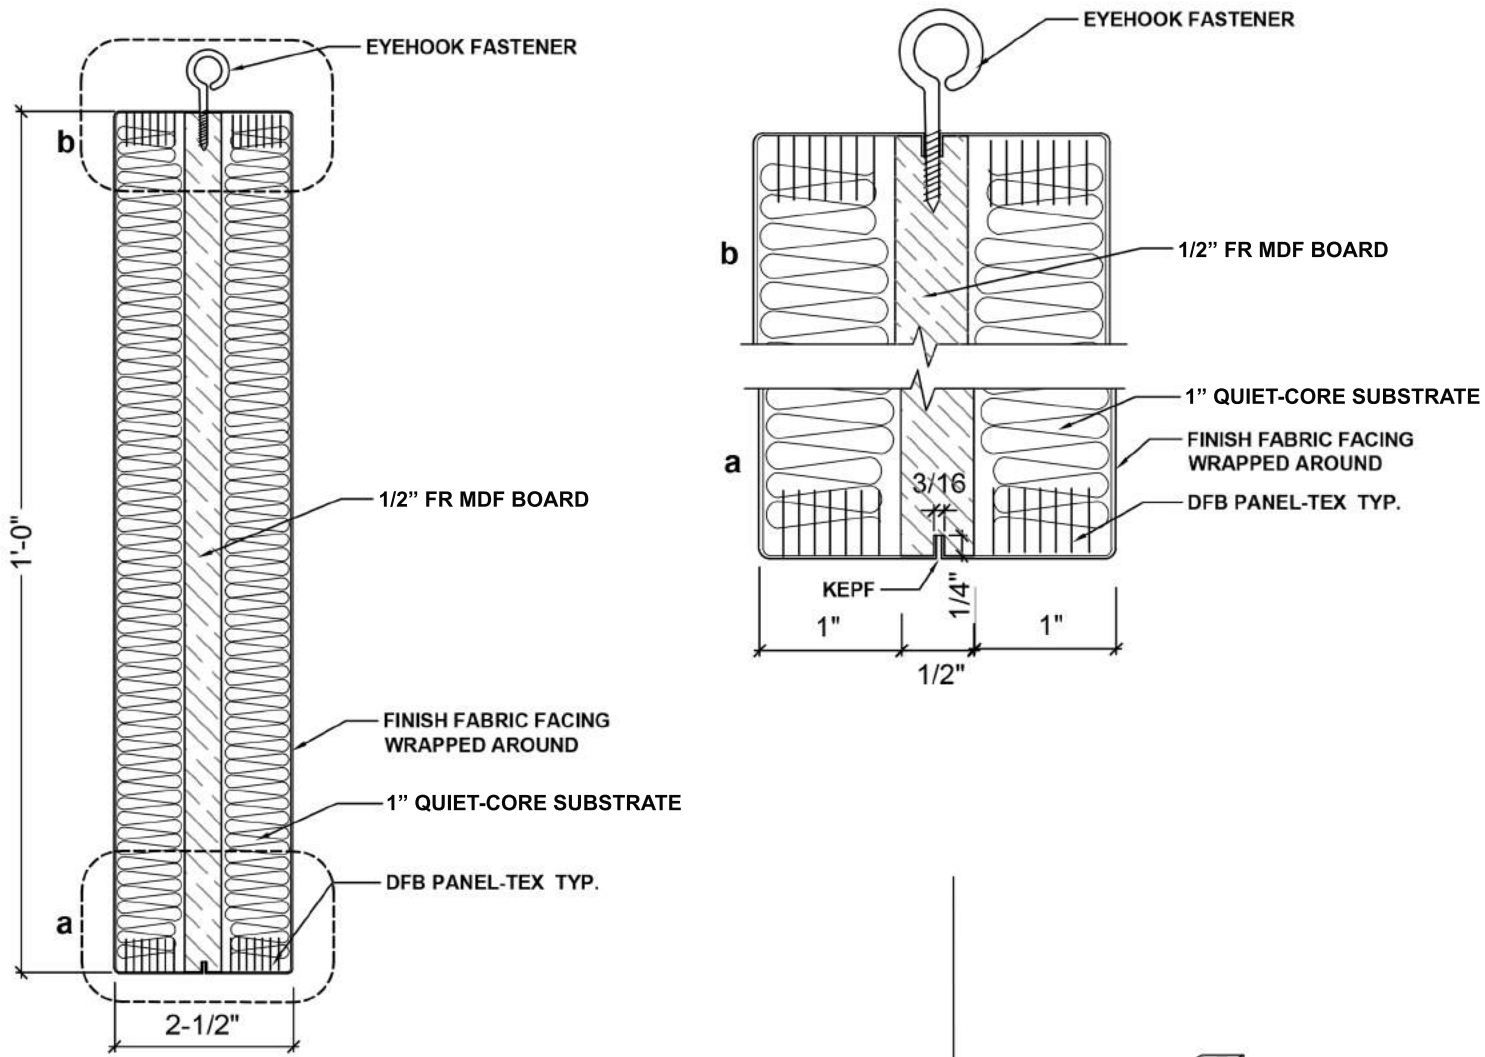

SECTION A-A

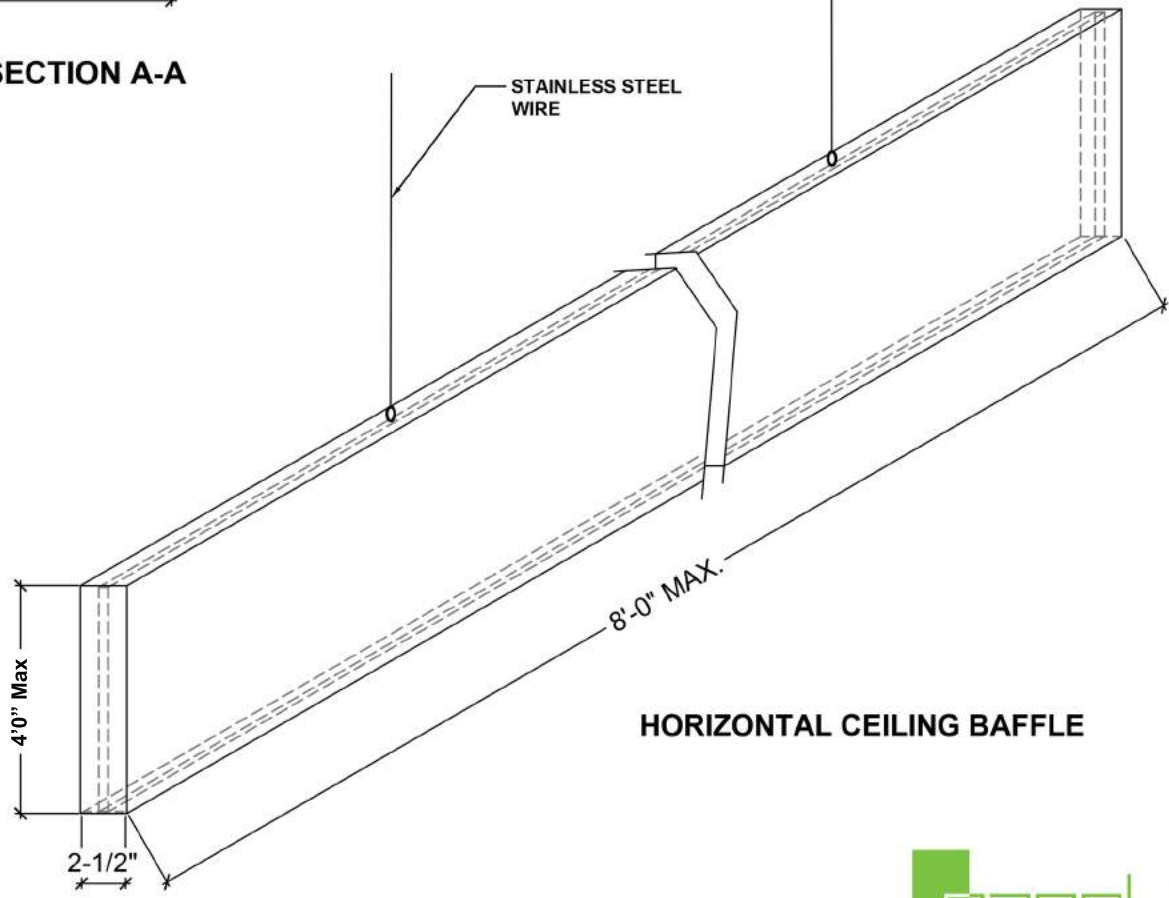

HORIZONTAL CEILING BAFFLE

SPECIFICATION

Name:	Panel-Tex Baffle
Manufacturer:	DFB Sales, Inc. 21-07 Borden Avenue, Long Island City, NY 11101
Substrate/ Content:	Quiet-Core Formaldehyde free fiberglass
Environmental:	Rapidly renewable and compostable.
Panel Max Height	48"
Panel Thickness':	2 1/2 "
Maximum Length:	120"
Hardware:	Includes panels + ceiling mounting system
Maintenance:	Vacuum occasionally.
Lead Time:	4-6 weeks
Custom:	Available upon request. Contact your local sales rep for limitations
Acoustics:	ASTMC 423: NRC—1.0 SAA 1.0
Recommended fabrics:	Carnegie Xorel & Camira Blazer Felt
Flammability:	California Technical Bulletin 117-2013; NFPA 260 + UFAC Class 1 Class A ASTM E 84

