



# BAFFLE

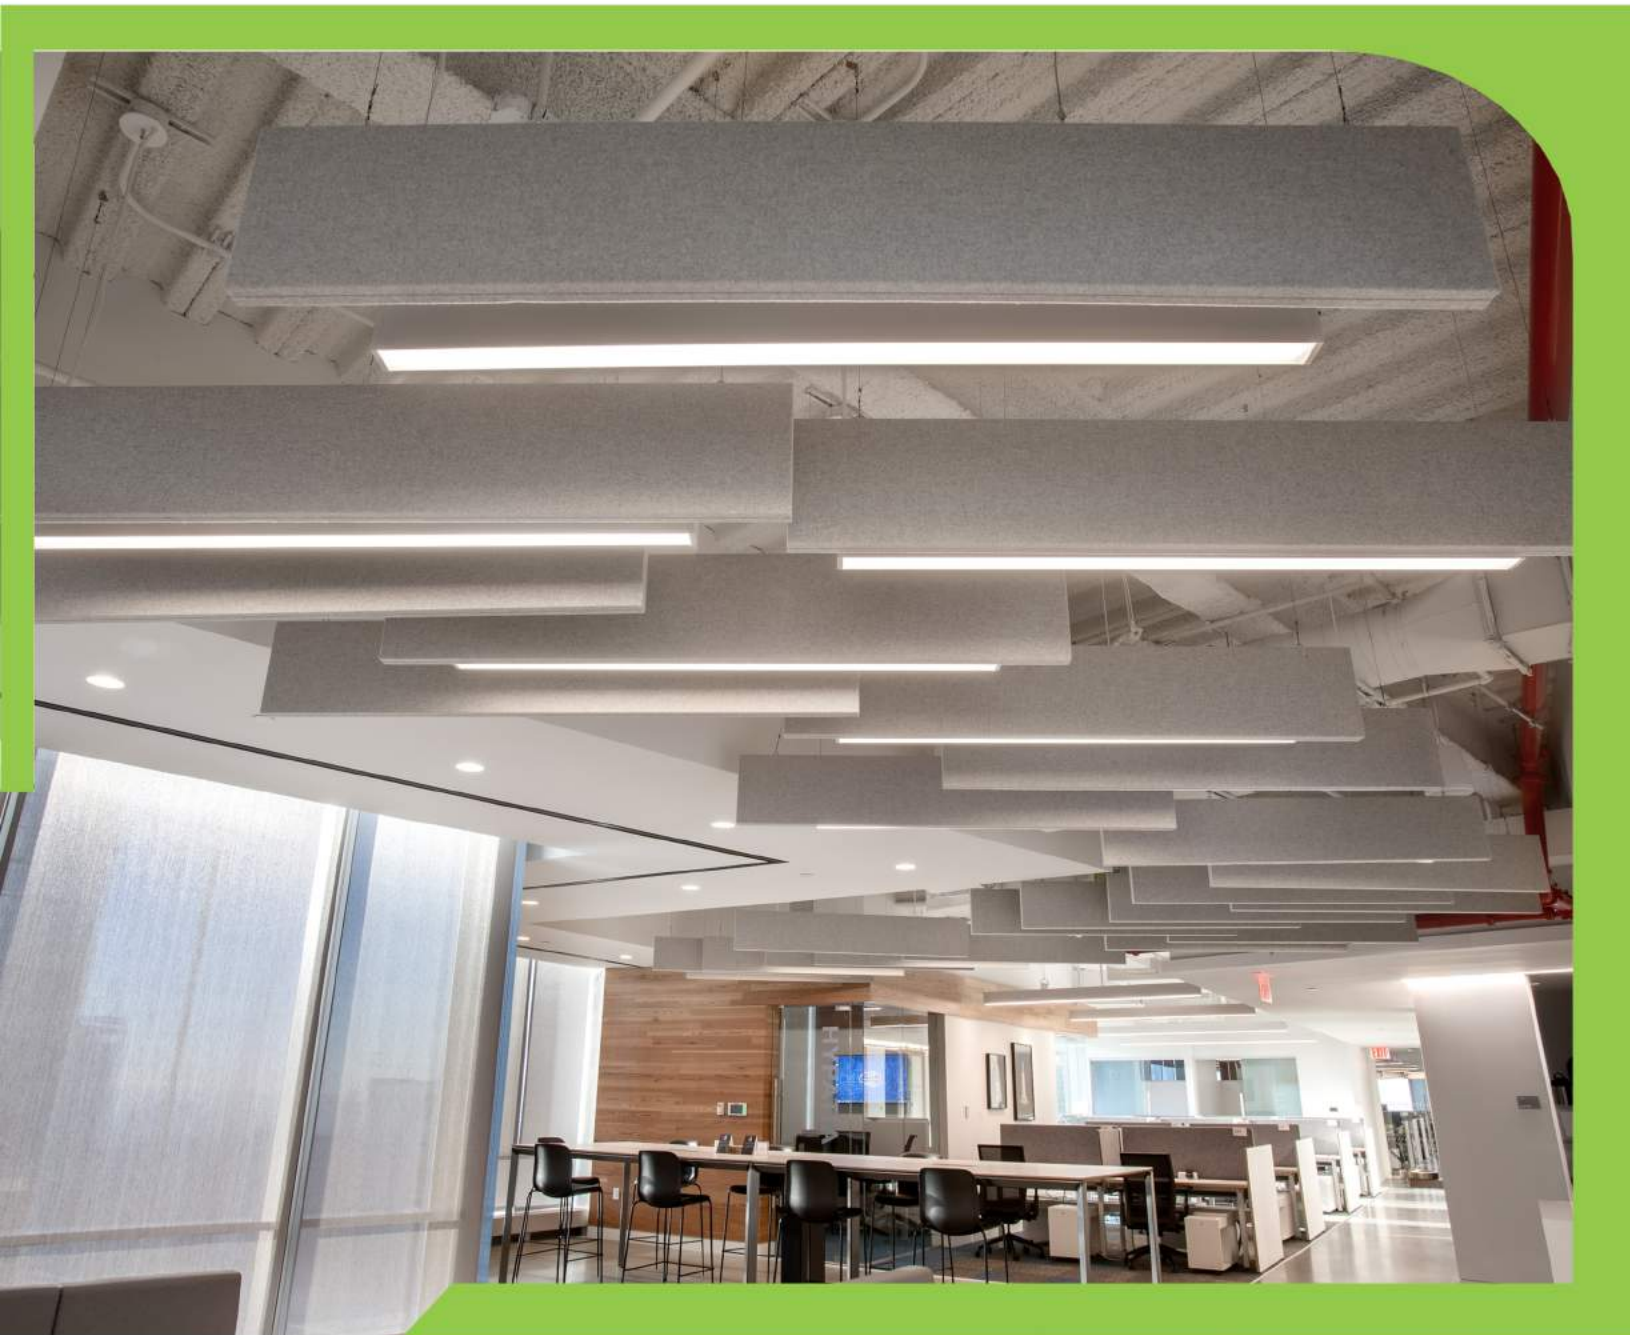


## ABOUT

Acoustics play an integral role in any space. A poor acoustic environment will often increase stress and decrease concentration. This application is suspended from the ceiling and can be installed in a multitude of patterns. Panel-Tex Baffles provide a 1.0 Noise Reduction Coefficient (NRC) rating wrapped in fabric. DFB recommends Carnegie Xorel or Camira Blazer felt for this application.

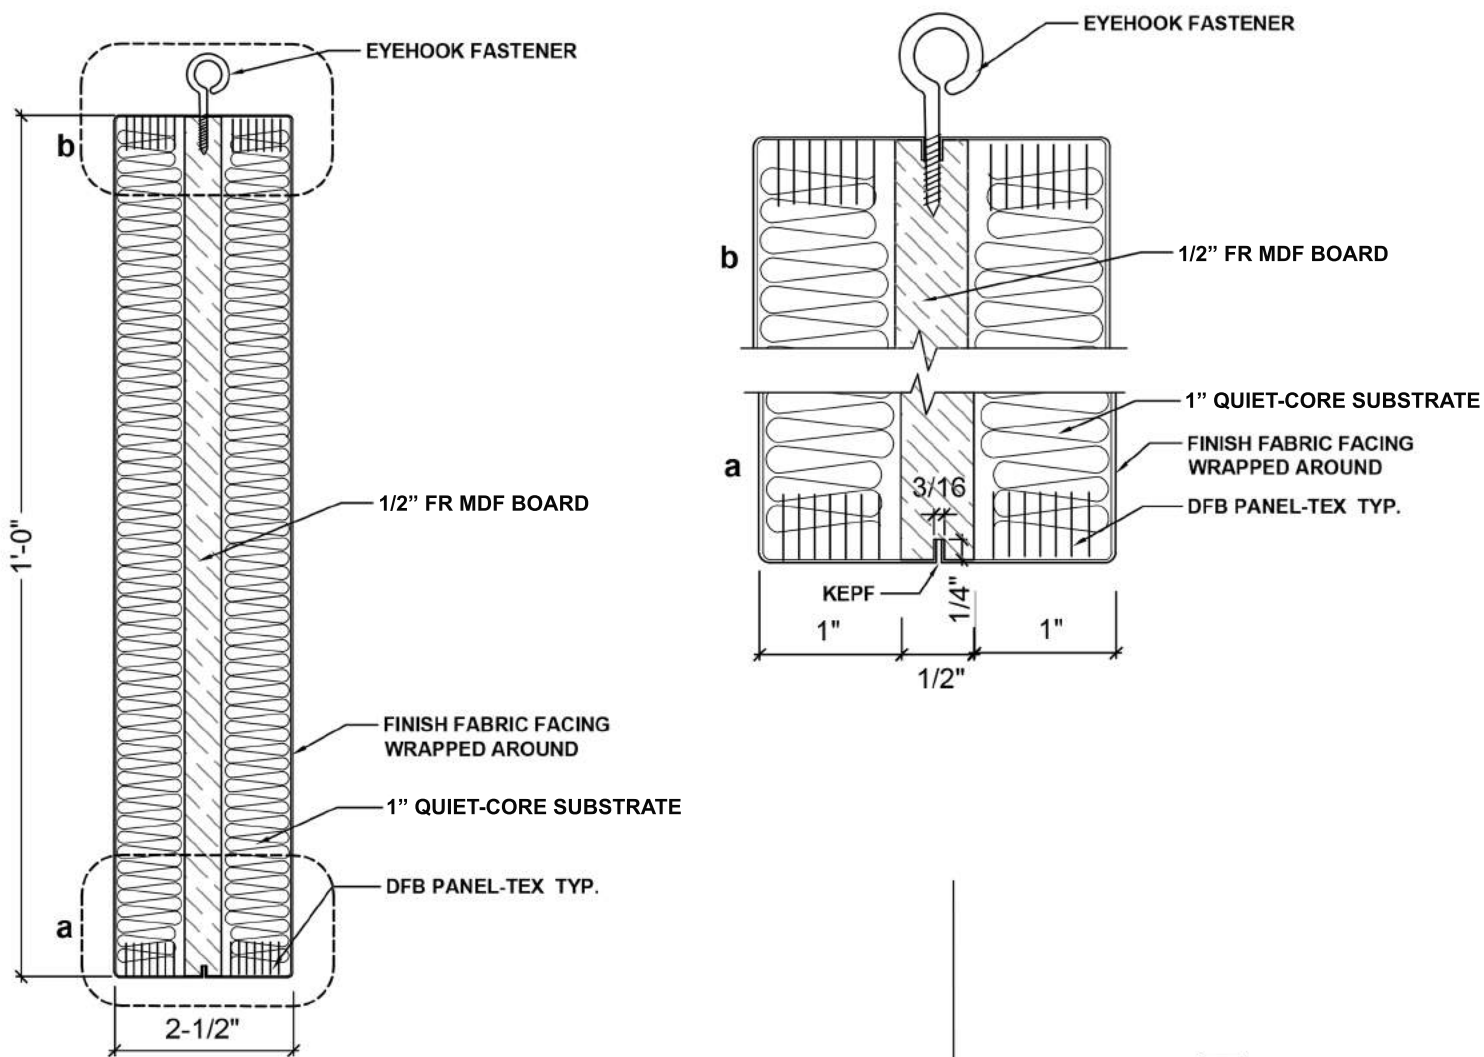

**SECTION A-A**

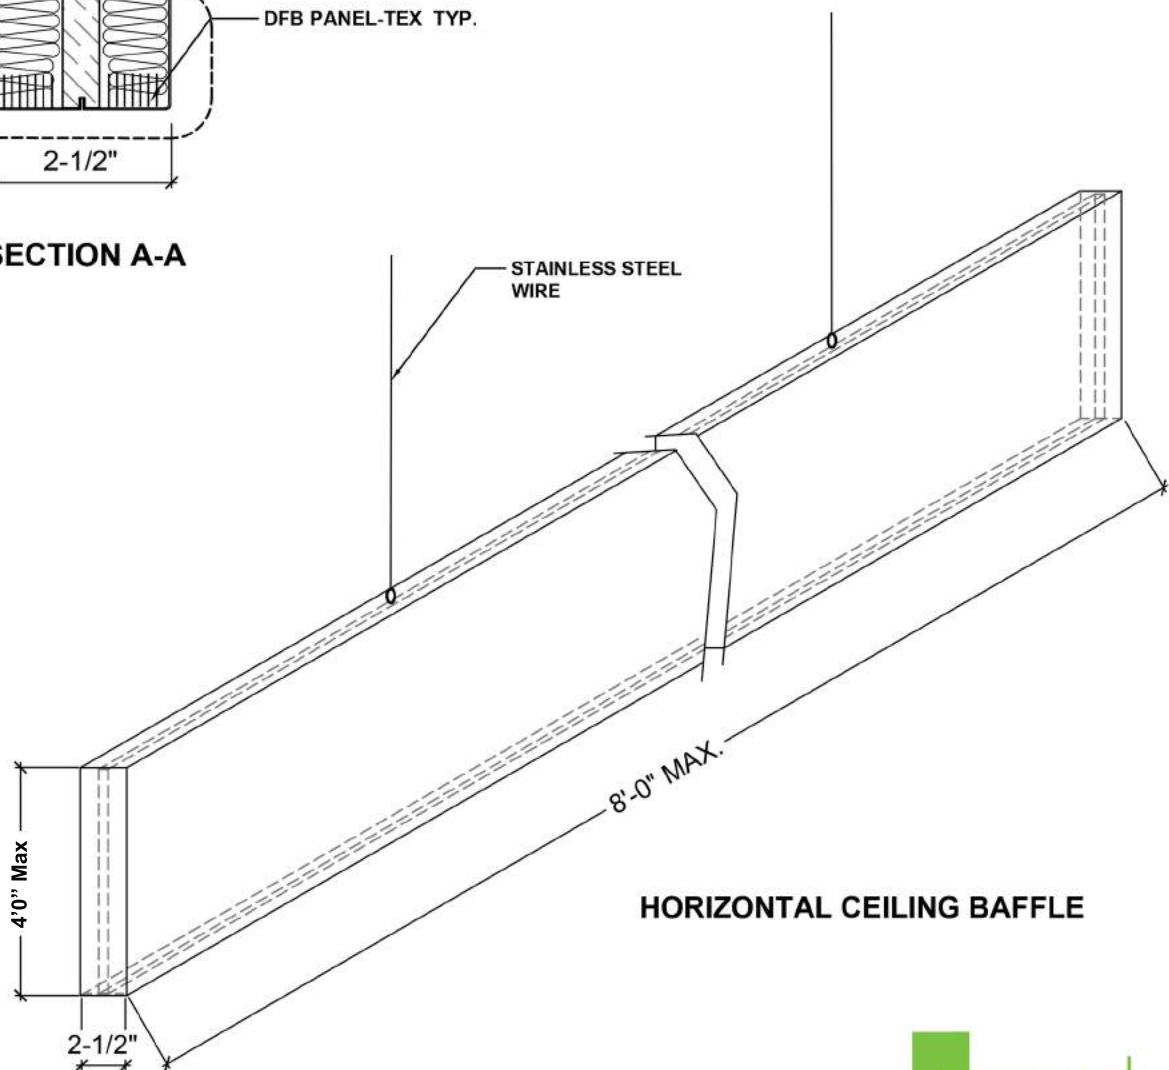

**HORIZONTAL CEILING BAFFLE**

## SPECIFICATION

<b>Name:</b>	Panel-Tex Baffle
<b>Manufacturer:</b>	DFB Sales, Inc. 21-07 Borden Avenue, Long Island City, NY 11101
<b>Substrate/ Content:</b>	Quiet-Core Formaldehyde free fiberglass
<b>Environmental:</b>	Rapidly renewable and compostable.
<b>Panel Max Height</b>	48"
<b>Panel Thickness':</b>	1 1/4 "
<b>Maximum Length:</b>	120"
<b>Hardware:</b>	Includes panels + ceiling mounting system
<b>Maintenance:</b>	Vacuum occasionally.
<b>Lead Time:</b>	4-6 weeks
<b>Custom:</b>	Available upon request. Contact your local sales rep for limitations
<b>Acoustics:</b>	ASTMC 423: NRC—1.0 SAA 1.0
<b>Recommended fabrics:</b>	Carnegie Xorel & Camira Blazer Felt
<b>Flammability:</b>	California Technical Bulletin 117-2013; NFPA 260 + UFAC Class 1

