

# DFB

The logo for 'swell' features a grey curved line above the word 'swell'. 'swell' is written in a lowercase, sans-serif font. 'sw' is in orange, 'e' is in red, and 'll' is in grey.



Interiors by The Switzer Group

DFB Sales  
21-07 Borden Avenue  
Long Island City, New York 11101  
[dfbsales.com](http://dfbsales.com)  
718-729-8310




SWELL consists of a series of individual modular panels available in 6 standard contours ranging from 2” to 10.” The unique elliptical shaped panels can be configured in a variety of patterns using a combination of standard or custom sizes.


13 new colors have been added to the fabric line, offering various neutral and bright shades.




# DFB




Dartmouth



Stanford




Barnard




Holyoke



Vassar




Woodcroft




Marymount




Abertay




Eynesbury




Vassar




Montcrest




Barlborough



Scottsdale



Sheffield



Aston




Manchester



Knightsbridge



Newcastle



Oxford



Glenalmond

Always request physical fabric samples prior to ordering to ensure color accuracy.


# DFB



Latymer



Tyndale



Cardiff



Glasgow



Edinburgh



Ulster



Camphill



Bryanson



Newport



Dunhurst



Wesley



St. Andrews



Fairfield



Goldsmith



Edgehill



Handcross



Oriol



Wellington




Magdalene



Silverdale

Always request physical fabric samples prior to ordering to ensure color accuracy.


# DFB



Plymouth



Surrey




Aberlour




Trevelyan



Bromsgrove



Kingsmead



Silcoates



Winchester



Hull



Napier

Always request physical fabric samples prior to ordering to ensure color accuracy.


## Features & Benefits

- Multiple design options.
- SWELL contours can be used in combination with flat fabric panels to achieve a Noise Reduction Coefficient of .90-1.0
- Easy installation by mounting panels directly onto wall using adhesive.
- Guaranteed short lead times.
- No additional charges for lengths up to 12 feet.
- Custom thickness and widths are available along with high density Foam-Core to keep the shape.
- Wrapped in 100% pure wool and approved COM fabrics.

## Specifications

- Content: Foam Core, Plywood, Felt
- Environmental: Rapidly renewable & compostable. Certified to the EU ecolabel.
- Panel Widths: 2",4",6",8",10"
- Maximum Plank Length: 120"
- Hardware: Panels & Quick Grab Forumla. Fabric end caps are available if the end of the Swell panels are exposed.
- Maintenance: Vacuum occasionally.
- Lead time: 4-6 weeks.
- Acoustics: ASTM C 423: NRC-1.0 SAA 1.0 Based off 3" Panel
- Variation: Batch to batch variations in shade may occur within commercial tolerances.
- Colorfastness to light: AATCC-16 (40 hours) 4 Minimum.
- Cleaning Code: S
- Flammability: California Technical Bulletin 117-2013; NFPA 260 + UFAC Class A

## Panel Widths

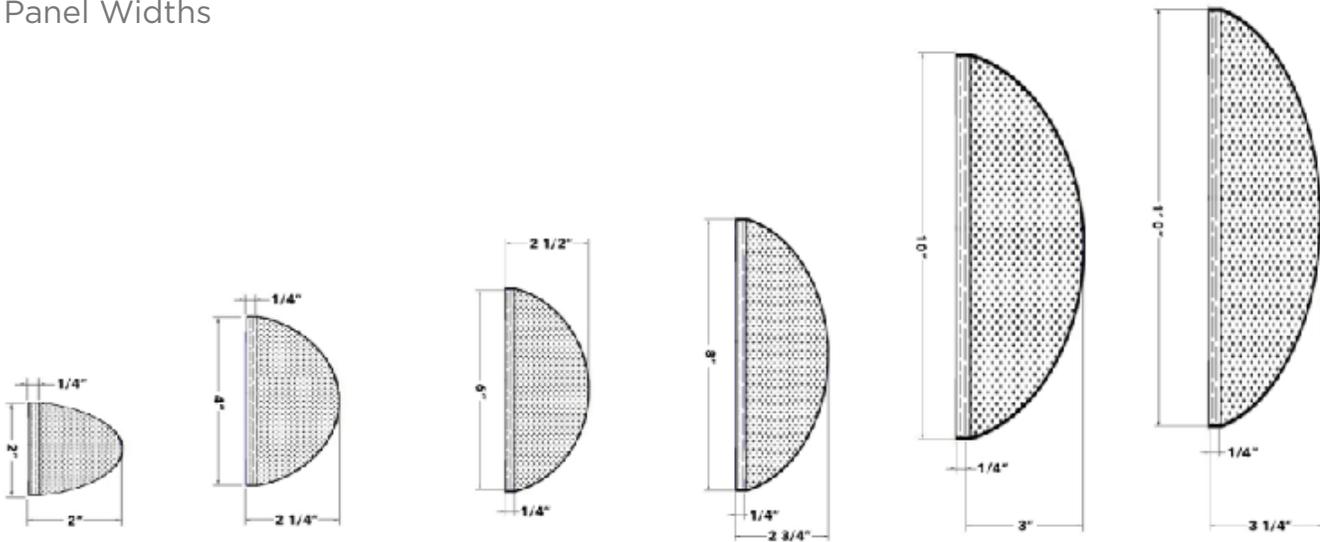

## Acoustical Ratings

(NRC) Noise Reduction Coefficient	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	Overall
4" Wedge	0.28	0.56	.86	1.13	1.20	1.23	.92