



SWELL CONTOURED PANELS

Our SWELL Panels fall under the Panel-Tex[™] umbrella offering unique elliptical shaped panels that can be configured in a variety of patterns, using a combination of standard and custom sizes. Standard widths range from 2" to 10", and can be mixed and matched allowing for maximum creativity. To further enhance your project, pair and install our SWELL panels with our traditional prefabricated panels for a highly acoustical room.



AMC Networks



Volunteers of America



Volunteers of America





SWELL SPECIFICATIONS

• Content: Substrate, Plywood, & Felt

• Panel Widths: 2", 4", 6", 8", & 10"

• Maximum Length: 120"

Mounting Options: Quick grab formula and concealed nails

• **Lead Time:** 4-6 weeks

Acoustics: ASTMC 423: >0.9 NRC, 1.0 SAA.

Fire Rating: California Technical Bulletin 117-2013; NFPA 260 + UFAC

Class 1

Colorfastness: AATCC-16 (40 Hours) 4 Minimum
Environmental: Rapidly renewable and compostable.


• **Seams:** Depending on the fabric specified, seams may

occur every 7 feet.

Panel Sizes:

Width	Thickness
2	2
4	2 ^{1/4}
6	2 ^{1/2}
8	2 ^{3/4}
10	3 ^{1/4}

Sound Absorption Coefficients

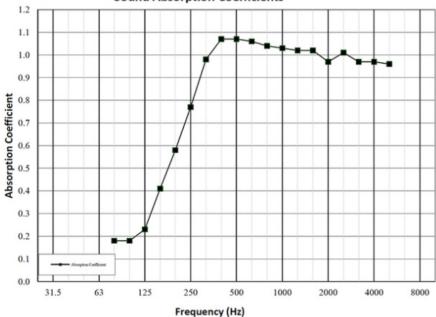





IEX Group

Volunteers of America