

The image shows a contemporary interior space. A curved wall is covered in vertical, grey acoustic panels. In the foreground, there is a bright red, curved sofa. To the right of the sofa, a portion of a white, round table is visible. The lighting is soft, creating a modern and functional atmosphere.

Swell Acoustical Panels



Dartmouth
CUZ2Q



Barlborough
CUZ3D



Stanford
CUZ2R



Marymount
CUZ3C



Woodcroft
CUZ2Z



St Andrews
CUZ86




Goldsmith
CUZ39




Scottsdale
CUZ3E



Manchester
CUZ1V




Plymouth
CUZ1R




Fairfield
CUZ47




Edge Hill
CUZ90



Sheffield
CUZ1T



Newcastle
CUZ1W



Aberlour
CUZ1J



Trevelyan
CUZ31




Oriel
CUZ18



Holyoke
CUZ2T



Edinburgh
CUZ1Y



Aston
CUZ02



Kingsmead
CUZ67



Handcross
CUZ63



Barnard
CUZ2S



Oxford
CUZ09



Vassar
CUZ2U



Winchester
CUZ12




Wellington
CUZ13



Magdalene
CUZ21



Glenalmond
CUZ62



Knightsbridge
CUZ26



Tyndale
CUZ2Y




Latymer
CUZ33



Penola
CUZ2X



Dunhurst
CUZ58



Silverdale
CUZ28




Montcrest
CUZ3A




Camphill
CUZ1K



Bryanston
CUZ53



Eynesbury
CUZ2W



Surrey
CUZ1E



Abertay
CUZ3B



Glasgow
CUZ1M



Newport
CUZ1L



Wesley
CUZ82



Silcoates
CUZ30




Hull
CUZ1P




Bromsgrove
CUZ35



Cardiff
CUZ1N



Ulster
CUZ1F



Napier
CUZ08


ABOUT

SWELL consists of a series of individual modular panels that can be mixed and matched allowing for maximum creativity. The unique elliptical shaped panels can be configured in a variety of patterns, using a combination of standard and custom sizes. Standard widths range from 2" to 10", and panels run vertically or horizontally, wall to wall, or ceiling to floor.

The Noise Reduction Coefficient, or NRC rating is >0.9, which satisfies all acoustical requirements.




PANEL WIDTHS

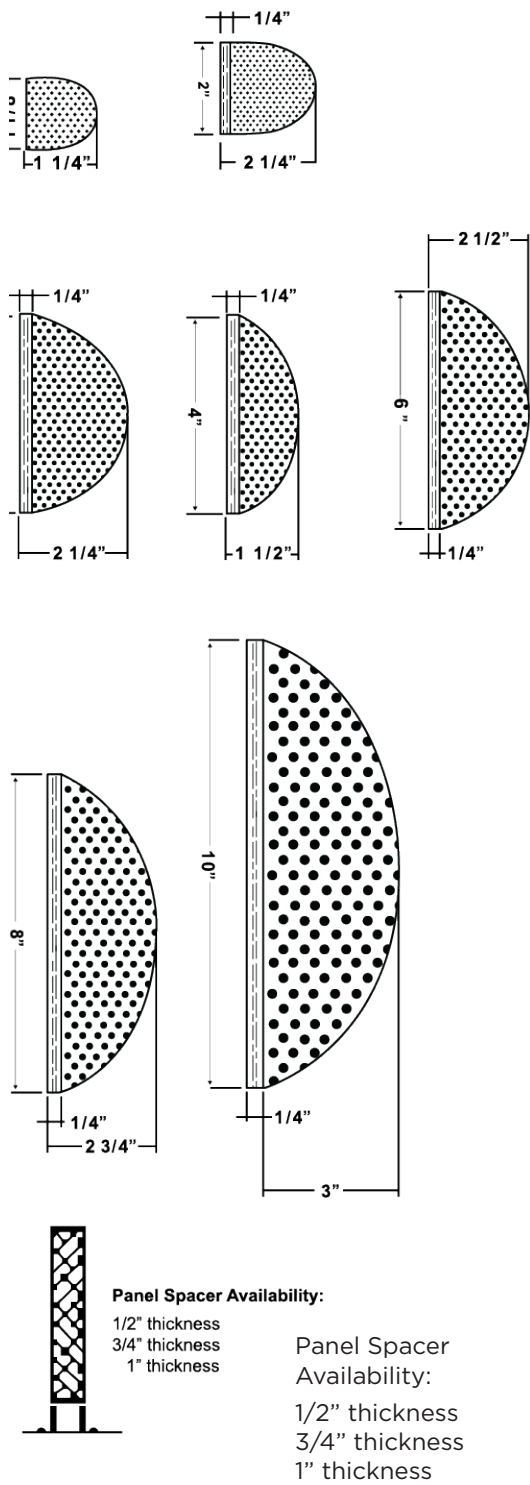

CONFIGURATION OPTIONS

Below are a few of our popular formations using a combination of sizes. Pair SWELL with traditional fabric wrapped panels to further enhance your project.

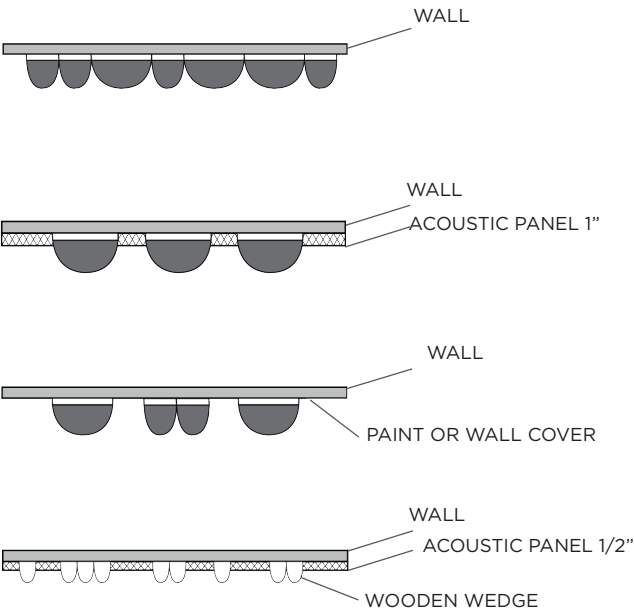

SPECIFICATIONS

- Product: Swell Contoured Acoustical Panels
- Content: Substrate, Plywood, Felt
- Panel Widths: 2", 4", 6", 8", & 10"
- Maximum Length: 120"
- Mounting Options: Quick grab formula and concealed nails
- Lead Time: 4-6 weeks
- Acoustics: ASTM C 423: NRC: >0.9, SAA 1.0
- Fire Rating: California Technical Bulletin 117-2013; NFPA 260 + UFAC Class 1
- Colorfastness: AATCC-16 (40 Hours) 4 Minimum
- Environmental: Certified to Indoor Advantage™ Gold
Rapidly renewable and compostable

ACOUSTICAL RATINGS

(NRC) Noise Reduction Coefficient	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	Overall
4" Wedge	0.28	0.56	0.86	1.13	1.20	1.23	.92

DFB



swell

camira

Blazer

Blazer is a classic pure new wool upholstery fabric with a billiard cloth felted finish. It is made from premium New Zealand lambswool, where responsible farming provides the highest quality raw material, which is soft, clean and bright, ideal for spinning, weaving and dyeing. The color palette is an exciting mix of solids and mélanges across the full color spectrum, creating a versatile fabric suitable for wide-ranging applications.



Blazer meets the ACT voluntary Performance Guidelines and is classified for Heavy Duty Upholstery.

Technical information

Composition

100% Pure New Wool
Non metallic dyestuffs

Environmental

Certified to Indoor Advantage™ Gold
Rapidly renewable and compostable

Width

54 inches minimum

Weight

13^{1/2} oz/sq yd ±5% (20^{1/4} oz/running. yd ±5%)

Abrasion Resistance*

ASTM D4157 Wyzenbeek method, Heavy Duty Upholstery
Independently certified to ≥75,000 double rubs
Covered by a full and comprehensive 10 year guarantee (full details available)

Flammability

California Technical Bulletin 117 - 2013
NFPA 260 + UFAC Class 1
BS 7176 Low Hazard
ASTM E84 Class 1 or A (Adhered)
ASTM E84 Class 1 or A (Un-adhered)
NFPA 701 when FR treated
Note: Flammability performance is dependent on components used. Our certificates show what substrates have been used in our tests. For composite tests customers must ensure their complete furniture meets the necessary standards.

Color Fastness to Light

AATCC-16 (40 hours) Class 4

Color Fastness to Crocking

AATCC-8 (Dry: 4, Wet: 3)

Cleaning

W/S

Clean with a water-based cleaning agent or solvent: Depending on the stain, you can use a dry-cleaning solvent, the foam of a mild detergent, or upholstery shampoo.

*Camira recognizes that the number of Wyzenbeek double rubs do not reflect the actual wear performance of fabrics. We're so confident in the durability of our products that we provide a robust 10 year guarantee (full details available).

This product is externally certified, details of which are on our website and available from our customer services team.

Batch to batch variations in shade may occur within commercial tolerances. We reserve the right to alter technical specifications without notice. The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.

DFB SALES

21-07 Borden Avenue,
Long Island City, NY 11101
T (718) 729-8310
dfbsales.com
sales@dfbsales.com

