




# PET BY DFB

Containing 100% recycled material, DFB's Sound Out™ wall and ceiling applications are safe, non-toxic, and non-allergenic.

DFB Sales 2107 Borden Avenue Long Island City, NY 11101 sales@dfbsales.com dfbsales.com

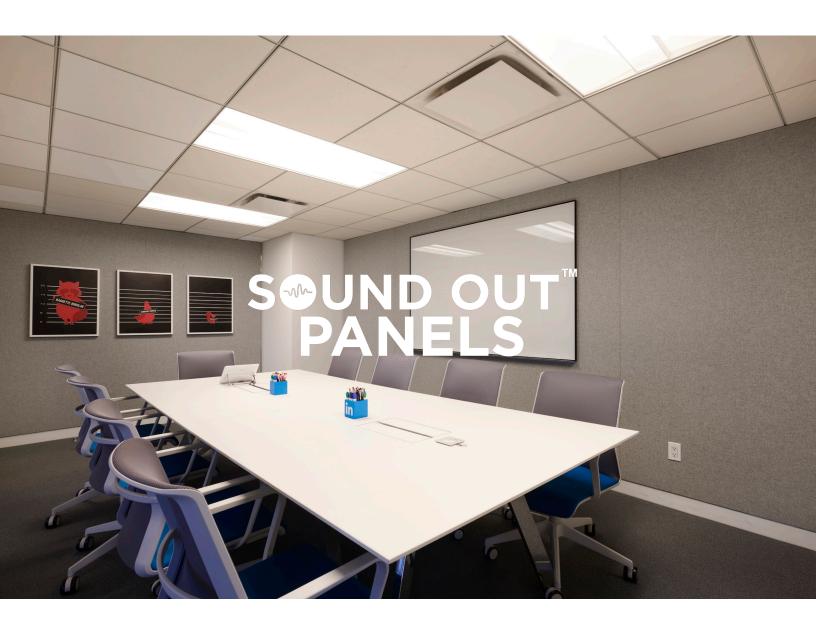







Sound Out Panels are lightweight, and designed to greatly reduce noise. This multiuse panel system is offered in a variety of shapes, colors, and patterns. Compared to traditional panels, Sound Out Panels are lower in weight, therefore easier to handle and install.

Sound Out Panels are highly customizable, with the ability to print patterns directly onto the substrate, while still maintaining the acoustical properties. Panels can be mixed and matched to create various color combinations.

Containing 100% recycled material, Sound Out Panels are safe, non-toxic, and non-allergenic.

#### **Specifications**

• **Product:** Sound Out Panels

Composition: 100% Polyester Fiber (PET)
 Panel Thickness: 1/2, 1 or 2 inch (~12, 24, 48mm)

• Maximum Width: 4 ft

• **Maximum Length:** 8 ft custom sizes available up to 10 feet

• **Lead Time**: 6-8 weeks

• Fire Rating: ASTM E84 Class A


• **Acoustics:** ASTMC 423: 1" 0.8 NRC, 0.83 SAA; 1/2" 0.45 NRC, 0.43 SAA

Environmental: Contains 100% previously recycled polyester fiber
 Custom: Custom sizes and shapes available upon request



## **Color Options**



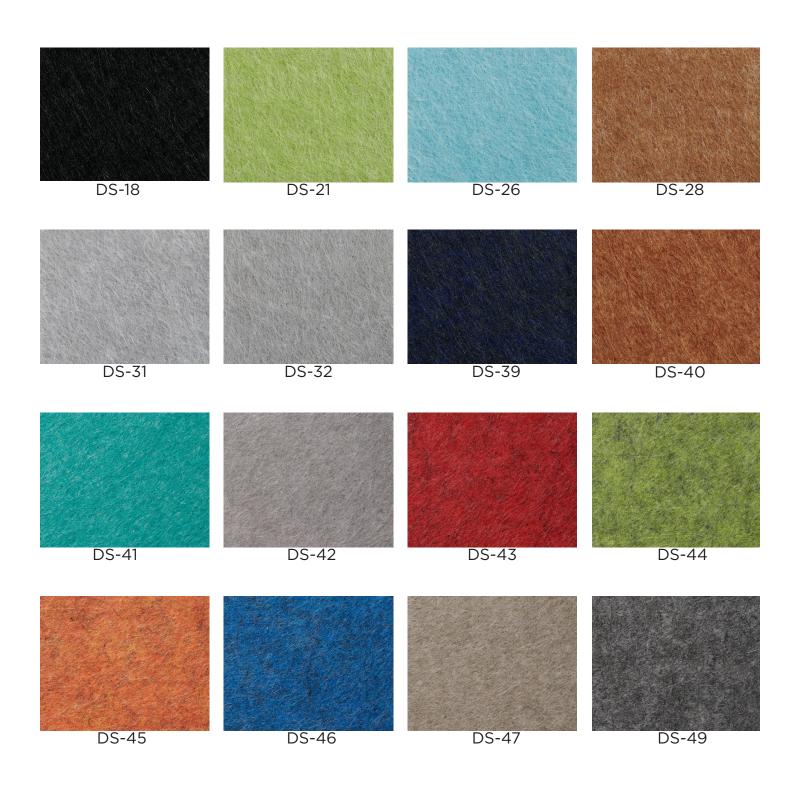



# SOUND OUT MERIDIAN



sales@dfbsales.com

dfbsales.com

## S**©UND OUT**™



#### SOUND OUT™ MERIDIAN

Acoustical PET wall covering with a ribbed texture. These easy to install tiles provide wall-to-wall coverage and a seamless installation. Containing 100% recycled material, Sound Out™ Meridian is safe, non toxic, and non-allergenic.

• **Product:** Sound Out<sup>™</sup> Meridian

Composition: 100% Polyester Fiber (PET)
 Panel Thickness: 1/2, 1 or 2 inch (~12, 24, 48mm)

• Panel Size: Recommended panel size 24x6" (610 x 153 mm)

• **Lead Time:** 6-8 weeks

• Fire Rating: ASTM E84 Class A

• **Acoustics:** ASTMC 423: 1" 0.8 NRC, 0.83 SAA; 1/2" 0.45 NRC, 0.43 SAA

Environmental: Contains 100% previously recycled polyester fiber
 Custom: Custom sizes and shapes available upon request





## **Color Options**





# S UND OUT LANE

sales@dfbsales.com

dfbsales.com





#### SOUND OUT™ LANE

Linear grooves are carved into up to 2 layers of PET creating unique patterns. These acoustical panels are available in a single color or two colors, and are offered in various custom patterns.

Product: Sound Out<sup>™</sup> Lane

Composition: 100% Polyester Fiber (PET)
Panel Thickness: 1/2, 1 or 2 inch (~12, 24, 48mm)

• Width: 39" (recommended maximum width)

• **Height:** 94"

Lead Time: 6-8 weeks

• **Acoustics:** ASTMC 423: 1" 0.8 NRC, 0.83 SAA; 1/2" 0.45 NRC, 0.43 SAA

Environmental: Contains 100% previously recycled polyester fiber

• **Custom:** Custom patterns, sizes, and colors available upon request







## Patterns to Inspire









#### **KP Colors**

The KP colors listed below are the base panel layer, while the KF colors are the top felt layer. Lane can be designed using a single color (KP colors) or two colors (KP + KF). Select your colors and then select your pattern.







**KF Colors**KF colors only apply for two-tone panels.





# S**©**UND OUT<sup>™</sup> TIDE



sales@dfbsales.com

dfbsales.com



## **Color Options**





KP-41 KP-4



## **Color Options**







#### SOUND OUT™ TIDE

Acoustical PET panels distinguished by their wavy pattern. Tide is available for a variety of applications, all offering acoustical solutions. Tide can be applied to the wall both vertically and horizontally.

Product: Sound Out<sup>™</sup> Tide

• **Composition:** 100% Polyester Fiber (PET)

• Panel Thickness: ~1.4" (35mm)

Width: 32" Height: 94"

• **Lead Time:** 6-8 weeks

Acoustics: Testing in progress

• Environmental: Contains 100% previously recycled polyester fiber.



## S**<b>©**UND OUT<sup>™</sup>



#### SOUND OUT™ TIDE BAFFLES

Horizontal hanging baffles suspended from the ceiling. Tide Baffles can stand alone, be grouped with multiple hanging Baffles, or paired with our Tide wall panels, for ultimate sound absorption.

Product: Sound Out<sup>™</sup> Tide Baffle

• **Composition:** 100% Polyester Fiber (PET)

• Panel Thickness: ~1.4" (35mm)

Width: 32" Length: 64"

Cable Height: Custom

• **Hardware:** Powder-coated Aluminum

• **Lead Time:** 6-8 weeks

• **Acoustics:** Testing in progress

• **Environmental:** Contains 100% previously recycled polyester fiber.





# SOUND OUT RUSTICA



## S**<b>©**UND OUT<sup>™</sup>



#### SOUND OUT™ RUSTICA

Rustica offers the benefits of PET and the rustic yet stylized aesthetic of our 8 wood veneer finishes. Select from our PET panel options below and pair it with your preferred veneer finish. Rustica can be installed horizontally or vertically on the wall.

• **Product:** Sound Out™ Rustica

• **Composition:** 100% Polyester Fiber (PET) + wood veneer

Panel Thickness: ~9.5mmVeneer Thickness: ~0.5mm


• Width: 24"

• **Height:** 94" (available in 48" heights)

• **Lead Time**: 6-8 weeks

• **Acoustics:** Testing in progress

• Environmental: Contains 100% previously recycled polyester fiber







## **PET Panel Options**



Always request physical samples prior to ordering to ensure color accuracy.

#### **Wood Veneer Finishes**



Always request physical samples prior to ordering to ensure color accuracy.