


S**[®]UND OUT**[™]



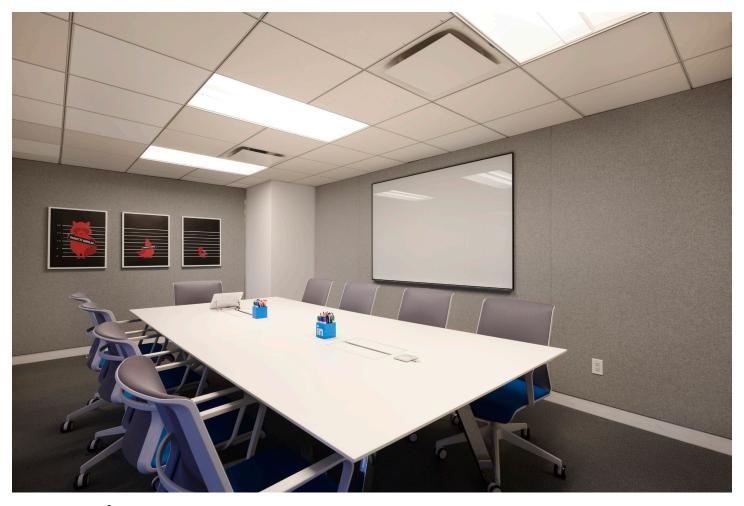

DFB Sales 21-07 Borden Avenue Long Island City, NY 11101 sales@dfbsales.com dfbsales.com

S**⊕UND OUT**[™]



PET BY DFB

Sound Out[™] Panels are DFB's traditional PET panels. They can be tailored to fit any wall using our standard 4x9' boards. Sound Out[™] Panels are lightweight making them easy to handle and install.

DFB's entire Sound Out[™] line is eco-friendly and VOC Free, and contains previously recycled polyester fiber, shaped and formed by heat.

Specifications

- **Product:** Sound Out[™] Panels
- **Composition:** 100% Polyester Fiber (PET)
- Panel Thickness: 0.47" or 0.94" (12, 24mm)
- Maximum Width: 47" (1220 mm)
- Maximum Length: 109" (2800 mm) custom sizes available up to 10'
- Lead Time:
- Fire Rating:
- Acoustics: ASTMC 423: 1" 0.75 NRC, 0.74 SAA; 1/2" 0.30 NRC, 0.33 SAA

4-8 weeks (project specific)

• Environmental: Contains previously recycled polyester fiber

ASTM E84 Class A

- Custom:
- Custom sizes available upon request



SO Colors Used for all Sound Out[™] Products

SO-01	SO-02	SO-03	SO-04
SO-06	SO-07	SO-08	SO-09
SO-10	SO-11	SO-12	SO-13
SO-14	SO-15	SO-16	SO-17
SO-18	SO-19	SO-20	SO-21
SO-22	SO-23	SO-24	SO-25

Always request physical samples prior to ordering to ensure color accuracy.



SO Colors



Always request physical samples prior to ordering to ensure color accuracy.



SO Colors



Always request physical samples prior to ordering to ensure color accuracy.